



Galaxy Dimension v.2 Integration Module
Settings Guide

1. Introduction into Galaxy Dimension v.2 Integration Module Settings Guide	3
2. Supported hardware and licensing of the Galaxy Dimension v.2 integration module	3
3. Configuring the Galaxy Dimension v.2 integration module	5
3.1 Procedure for configuring the Galaxy Dimension v.2 integration module	5
3.2 Configuring interaction between ACFA Intellect and the Galaxy Dimension v.2 control panel	5
3.2.1 Procedure for configuring interaction between ACFA Intellect and the Galaxy Dimension v.2 control panel	5
3.2.2 Configuring the connection between ACFA Intellect and the Galaxy Dimension v.2 control panel	5
3.2.3 Configuring the data exchange protocol with the Galaxy Dimension v.2	7
3.2.4 Synchronization of the Galaxy Dimension v.2 control panel and ACFA Intellect software package	8
3.3 Configuring the Galaxy Dimension v.2 keypads	8
3.4 Configuring the Galaxy Dimension v.2 groups	9
3.5 Configuring the Galaxy Dimension v.2 control modules	10
3.6 Configuring the Galaxy Dimension v.2 readers	11
3.7 Configuring the Galaxy Dimension v.2 input-output modules	12
3.8 Configuring the Galaxy Dimension v.2 outputs	13
3.9 Configuring the Galaxy Dimension v.2 security zones	14
4. Working with the Galaxy Dimension v.2 integration module	15
4.1 General information about working with the Galaxy Dimension v.2 integration module	15
4.2 Control the Galaxy Dimension v.2 group	16
4.3 Control the Galaxy Dimension v.2 keypad	16
4.4 Control the Galaxy Dimension v.2 control panel	16
4.5 Control the Galaxy Dimension v.2 input-output module	17
4.6 Control the Galaxy Dimension v.2 control module	17
4.7 Control the Galaxy Dimension v.2 security zone	17

Introduction into Galaxy Dimension v.2 Integration Module Settings Guide

On the page:

- Purpose of the document
- General information about the Galaxy Dimension v.2 integration module

Purpose of the document

The *Galaxy Dimension v.2* Integration Module Settings Guide is an informational reference manual designed for configuration specialists and operators of the *Galaxy Dimension v.2* module. This module is part of the *ACFA Intellect* software package.

This Guide contains the following material:

1. general information about the *Galaxy Dimension v.2* integration module
2. configuration of the *Galaxy Dimension v.2* integration module
3. operation of the *Galaxy Dimension v.2* integration module.

General information about the Galaxy Dimension v.2 integration module

The *Galaxy Dimension v.2* integration module is a component of the *ACFA Intellect* software package and designed for interaction with the *Galaxy Dimension v.2* system (produced by Honeywell, Inc.).

ACFA Intellect interacts with the following components of the *Galaxy Dimension v.2* system:

1. *Galaxy Dimension v.2* control panel;
2. MK7 keyboard;
3. security zone;
4. group;
5. door control module;
6. output.



Note.

For more information about components of the *Galaxy Dimension v.2* system, refer to the official documentation of the *Galaxy Dimension v.2* control panel.

The *Galaxy Dimension v.2* integration module performs the following functions:

1. monitoring of the the *Galaxy Dimension v.2* system
2. control of the the *Galaxy Dimension v.2* system

Before configuring the *Galaxy Dimension v.2* integration module, do the following:

1. Install *Galaxy Dimension v.2* hardware on the secured object.
2. Configure functional of the fire and security alarm of the *Galaxy Dimension v.2* system (refer to the documentation of the *Galaxy Dimension v.2* control panel).



Note.

The *Galaxy Dimension v.2* integration module is configured using the settings specified at this step.

3. Configure the list of *ACFA Intellect* users.



Note.

The user list can be configured through the basic version of *ACFA Intellect* (simplified configuration) or by using the *Visitor Management System* module (advanced configuration). Information on configuring the user list is presented in the software's reference documentation.

Supported hardware and licensing of the Galaxy Dimension v.2 integration module

Manufacturer	Honeywell Systems Group Video and Access Control Solutions Aston Fields Road Whitehouse Industrial Estate Runcorn Cheshire WA7 3DL United Kingdom Tel: +44 (0)8448 000 235 Fax: + 44 (0)01928 754050 Email: sales.video.uk@honeywell.com www.security.honeywell.com
Integration type	Low-level protocol
Equipment connection	RS-232

Supported equipment

Equipment	Function	Features
Galaxy GD-48	Control panel	<ul style="list-style-type: none"> 8 independent protected areas up to 48 detection zones (16 zones on-board) up to 8 doors up to 100 card holders per system 19 weekly schedules supports up to 8 keypads Support for 1 graphical touch-screen keypad Individual AC (500 events) and FA (1,000 events) event logs Supports several communications options (PSTN, ISDN, Ethernet) Up to 8 Audio Verification (listen-in) channels Compliant to all relevant Russian and European standards Fully compatible with existing Galaxy range
Galaxy GD-96	Control panel	<ul style="list-style-type: none"> 16 independent protected areas up to 96 detection zones (16 zones on-board) up to 32 doors up to 250 card holders per system 35 weekly schedules supports up to 16 keypads Support for 2 graphical touch-screen keypads Individual AC (1,000 events) and FA (1,500 events) event logs Supports several communications options (PSTN, ISDN, Ethernet) Up to 16 Audio Verification (listen-in) channels Compliant to all relevant Russian and European standards Fully compatible with existing Galaxy range
Galaxy GD-264	Control panel	<ul style="list-style-type: none"> Up to 520 zones Control of access for 64 doors Up to 1000 card holders per system 67 weekly schedules Supports up to 16 keypads Supports for 2 graphical touch-screen keypads Individual ACS (1,000 events) and FAS (1,500 events) event logs Supports several communications options (PSTN, ISDN, Ethernet) Up to 32 Audio Verification (listen-in) channels Compliant to all relevant Russian and European standards Fully compatible with existing Galaxy range
Galaxy GD-520	Control panel	<ul style="list-style-type: none"> Up to 520 detection zones Control of access for 64 doors Up to 1000 card holders per system 67 weekly schedules Supports up to 32 keypads Supports for 4 graphical touch-screen keypads Individual ACS (1,000 events) and FAS (1,500 events) event logs Supports several communications options (PSTN, ISDN, Ethernet) Up to 32 Audio Verification (listen-in) channels Compliant to all relevant Russian and European standards Fully compatible with existing Galaxy range

DCM	Access controller	<p>Up to 2 doors controlled (up to 64 per system). Up to 999 users (card holders). Separate Access event log (up to 1000 events). User's access controlled by access templates and group set status (armed/disarmed). Up to 32 yearly holiday schedule Area behind a door is unset automatically upon access if user has authority. This prevents false alarms due to failure to unset.</p> <p>Wiegand compatibility Gives the flexibility to work with a huge range of reader and card technologies up to 40 bits.</p> <p>Allows compatibility to retrofit existing installations Compatible with Wiegand keypads that use 8-bit burst mode</p>
-----	-------------------	---

Protection

1 COM port, in fact – any one Galaxy GD control panel.

Configuring the Galaxy Dimension v.2 integration module

Procedure for configuring the Galaxy Dimension v.2 integration module


The *Galaxy Dimension v.2* integration module is configured as follows:

1. Configure interaction between *ACFA Intellect* and the *Galaxy Dimension v.2* control panel.
2. Configure the MK7 keypad, which will be used to configure and control the *Galaxy Dimension v.2* control panel.
3. Configure *Galaxy Dimension v.2* security zones.
4. Configure *Galaxy Dimension v.2* groups.
5. Configure *Galaxy Dimension v.2* outputs.
6. Configure *Galaxy Dimension v.2* door control modules.
7. Configure *Galaxy Dimension v.2* input-output modules.
8. Configure *Galaxy Dimension v.2* readers.

Configuring interaction between ACFA Intellect and the Galaxy Dimension v.2 control panel

Procedure for configuring interaction between ACFA Intellect and the Galaxy Dimension v.2 control panel

Interaction between *ACFA Intellect* and the *Galaxy Dimension v.2* control panel is configured through the settings panel of the **Galaxy Dimension v.2** object. This object is created from the **Computer** object on the **Hardware** tab of the **System settings** dialog box.

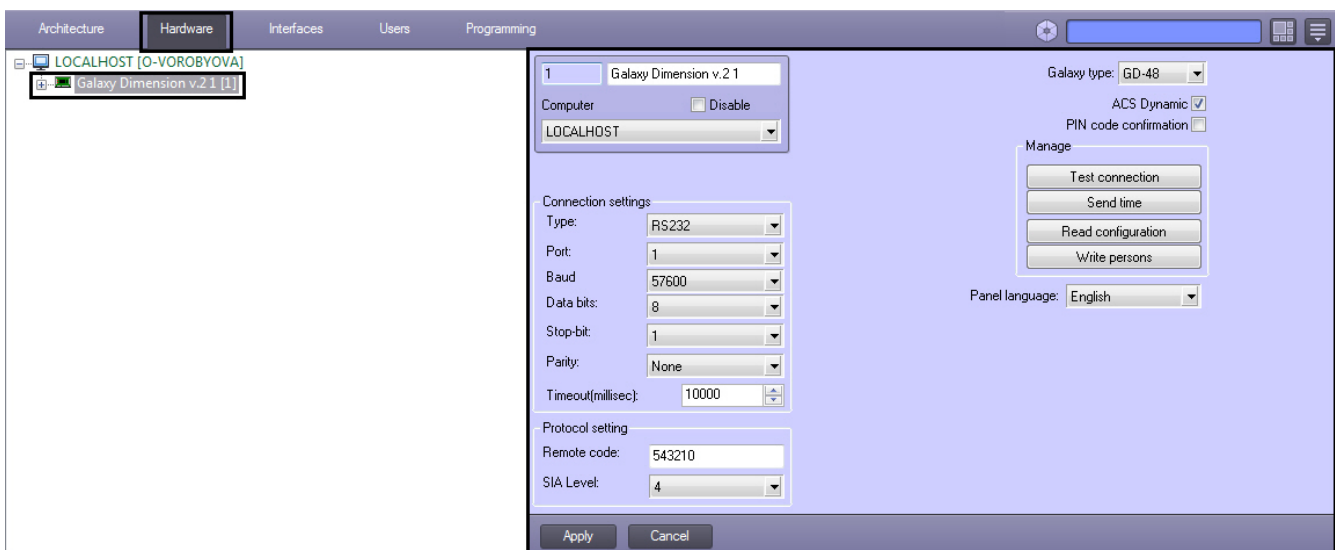

Interaction between *ACFA Intellect* and the *Galaxy Dimension v.2* control panel is configured as follows:

1. Configure the connection between *ACFA Intellect* and the *Galaxy Dimension v.2* control panel.
2. Configure the data exchange protocol used by *ACFA Intellect* and the *Galaxy Dimension v.2* control panel.
3. Synchronization of the *Galaxy Dimension v.2* control panel and *ACFA Intellect* software package.

Configuring the connection between ACFA Intellect and the Galaxy Dimension v.2 control panel

The connection between *ACFA Intellect* and the *Galaxy Dimension v.2* control panel is configured as follows:

1. Go to the settings panel of the **Galaxy Dimension v.2** object.

The screenshot shows the settings panel for the Galaxy Dimension v.2 object. The fields and buttons are numbered as follows:

- 1:** Galaxy type: GD-48
- 2:** ACS Dynamic checkbox (checked)
- 3:** PIN code confirmation checkbox (unchecked)
- 4:** Connection settings Type: RS232
- 5:** Connection settings Port: 1
- 6:** Connection settings Baud: 57600
- 7:** Connection settings Data bits: 8
- 8:** Connection settings Stop-bit: 1
- 9:** Connection settings Parity: None
- 10:** Connection settings Timeout(millisecond): 10000
- 11:** Panel language: English
- 12:** Test connection button

2. From the **Galaxy type:** drop-down list select the type of connected control panel (**1**).
3. Set the **ACS Dynamic** checkbox for dynamic sending configuration to the *Galaxy Dimension v.2* control panel (**2**).
4. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (**3**).
5. From the **Type:** drop-down list select the type of connection between the *Galaxy Dimension v.2* control panel and the *Intellect Server* (**4**).
6. From the **Port:** drop-down list, select the COM port of the *Intellect Server* to be used to connect with the *Galaxy Dimension v.2* control panel (**5**).



Note.

If the **TCP** type of connection is selected then the corresponding IP-address of the *Galaxy Dimension v.2* control panel, IP-address of receiving events from the control panel, number of port through which events should be received and connection timeout in milliseconds are to be specified.

The screenshot shows the Connection settings dialog box with the following values:

- Type: TCP
- Galaxy address: 0 . 0 . 0 . 0
- Address for events: 0 . 0 . 0 . 0
- Port for events: 10002
- Timeout(millisecond): 10000

7. From the **Baud:** drop-down list, select the data exchange rate between the *Intellect Server* and the *Galaxy Dimension v.2* control panel. This parameter is expressed in bits per second (**6**).
8. From the **Data bits:** drop-down list, select the number of data bits to be coded by a single transition in signal for data exchange (**7**).
9. From the **Stop-bit:** drop-down list, select the number of stop bits for data exchange over the COM port (**8**).
10. From the **Parity:** drop-down list, select the necessary parity for data exchange (**9**).
11. In the **Timeout (millisec):** field enter the time period in milliseconds during which check of connection with the *Galaxy Dimension v.2* control panel is performing (**10**).
12. From the **Panel language:** drop-down list select the language of the *Galaxy Dimension v.2* control panel (**11**).

13. To save changes, click **Apply**.
14. To test the established connection click the **Test connection** button (12).

Configuring of the connection between *ACFA Intellect* and the *Galaxy Dimension v.2* control panel is completed.

Configuring the data exchange protocol with the Galaxy Dimension v.2

Data exchange between the *ACFA Intellect* server and the *Galaxy Dimension v.2* control panel is carried out using the SIA protocol.

Note. For more information on protocols used in the *Galaxy Dimension v.2* system, refer to the official documentation of the *Galaxy Dimension v.2* control panel.

The SIA protocol is configured as follows:

1. Go to the settings panel of the **Galaxy Dimension v.2** object.

2. In the **Remote code:** field, enter the password used to connect the *Intellect* Server to the *Galaxy Dimension v.2* control panel. This password must match the password used to remotely access the panel (1).

Note. For more information on passwords in the *Galaxy Dimension v.2* system, refer to the official documentation of the *Galaxy Dimension v.2* system.

3. From the **SIA level:** drop-down list, select the value corresponding to the required level of interaction between the *Intellect* Server and the *Galaxy Dimension v.2* control panel over the SIA protocol (2).

SIA level	Description of the level of interaction between the Intellect Server and the Galaxy Dimension v.2 control panel
1	Transmits basic information on the event
2	Same as level 1, but including transmission of advanced event codes
3	Same as level 2, but including transmission of text descriptions of events
4	Same as level 3, but also allows reception of commands for managing the control panel

Note. Full interaction (monitoring, management) between the *Intellect* Server and the *Galaxy Dimension v.2* control panel is only provided through the 4th level of SIA.

4. Click **Apply** to save settings.

Configuration of the SIA protocol is completed.

Synchronization of the Galaxy Dimension v.2 control panel and ACFA Intellect software package

To synchronize the *Galaxy Dimension v.2* control panel and *ACFA Intellect* software package, do the following:

1. Go to the settings panel of the **Galaxy Dimension v.2** object.


The screenshot shows the settings panel for the Galaxy Dimension v.2 object. The 'Computer' section includes a dropdown for 'Computer' set to 'LOCALHOST' and a 'Disable' checkbox. The 'Connection settings' section has a 'Type' dropdown set to 'TCP', 'Galaxy address' and 'Address for events' fields both set to '0.0.0.0', 'Port for events' set to '10002', and 'Timeout(millisecond)' set to '10000'. The 'Protocol setting' section has 'Remote code' set to '543210' and 'SIA Level' set to '4'. The 'Manage' section contains three buttons: 'Test connection', 'Send time' (labeled with a '1'), 'Read configuration' (labeled with a '2'), and 'Write persons' (labeled with a '3'). The 'Panel language' dropdown is set to 'English'. At the bottom are 'Apply' and 'Cancel' buttons.

2. Click the **Send time** button to synchronize system time of the *Intellect* Server and internal time of the *Galaxy Dimension v.2* control panel (1).
3. Click the **Read configuration** button to read configuration of the *Galaxy Dimension v.2* control panel (2). As a result the standard window of files selection will open, it is required to select the corresponding file with .mdb resolution from which configuration will be read.
4. Click the **Write persons** to write users to the *Galaxy Dimension v.2* control panel (3).

To save changes click the **Apply** button.

Configuring the Galaxy Dimension v.2 keypads

The MK7 keyboard is configured through the settings panel of the **GD Keypad MK7** object. This object is created from the **Galaxy Dimension v.2** object on the **Hardware** tab of the **System settings** dialog box.

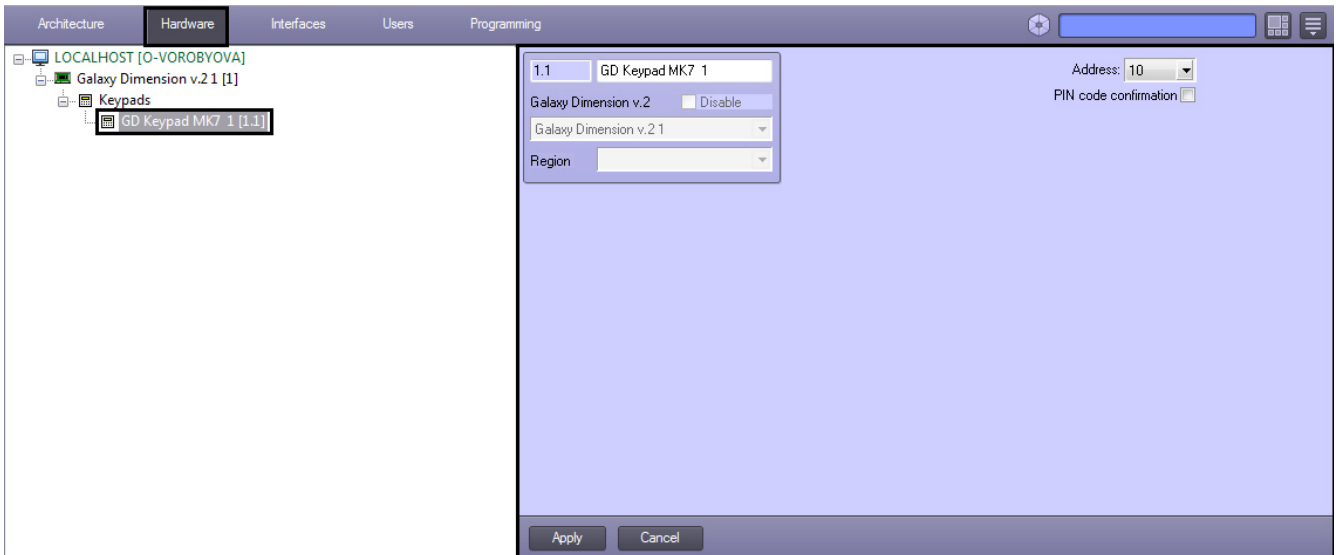

Note.
The **GD Keypad MK7** object must match the *Galaxy Dimension v.2* panel to which the keypad is connected.

The MK7 keyboard is configured as follows:

1. Go to the settings panel of the **GD Keypad MK7** object.




2. From the **Address** drop-down list select the address displayed for the specific keypad into the operator's menu of the *Galaxy Dimension v.2* control panel (**1**).
3. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (**2**).
4. Click **Apply** to save changes.
5. Repeat steps 1-4 for all MK7 keypads connected to the panel.

Configuration of the MK7 keypad is completed.


Configuring the Galaxy Dimension v.2 groups

The *Galaxy Dimension v.2* control panel groups are configured in the settings panel of the **GD Group** object. This object is created from the **Galaxy Dimension v.2** object on the **Hardware** tab of the **System settings** dialog box.

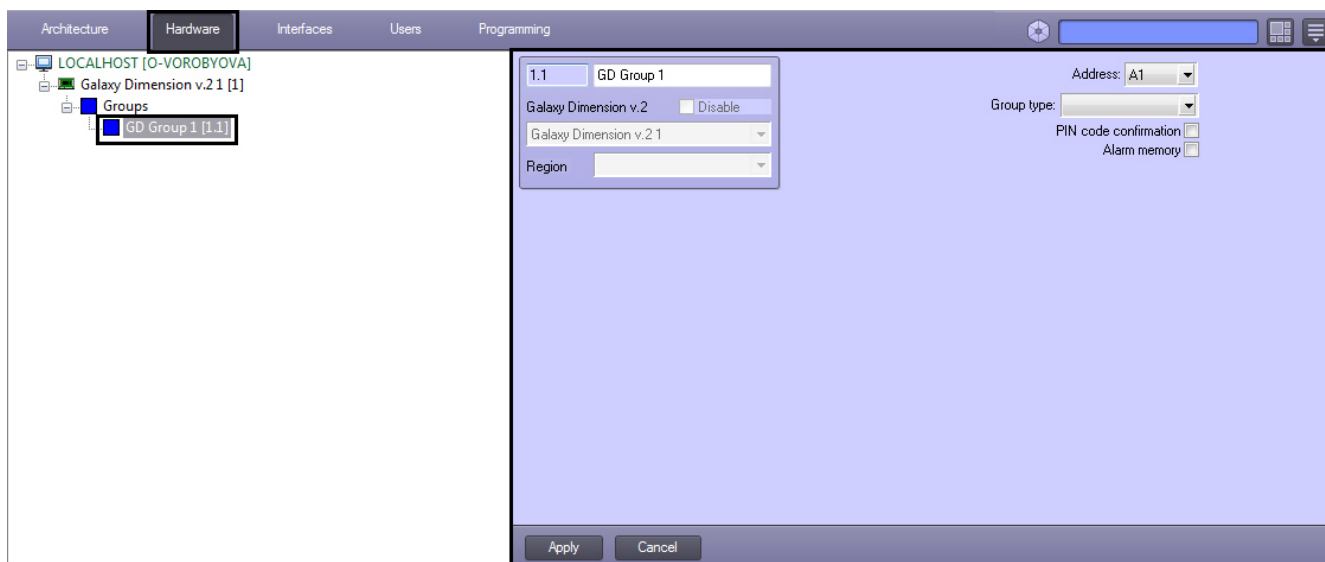

The *Galaxy Dimension v.2* groups are configured as follows:

1. Go to the settings panel of the **GD Group** object.

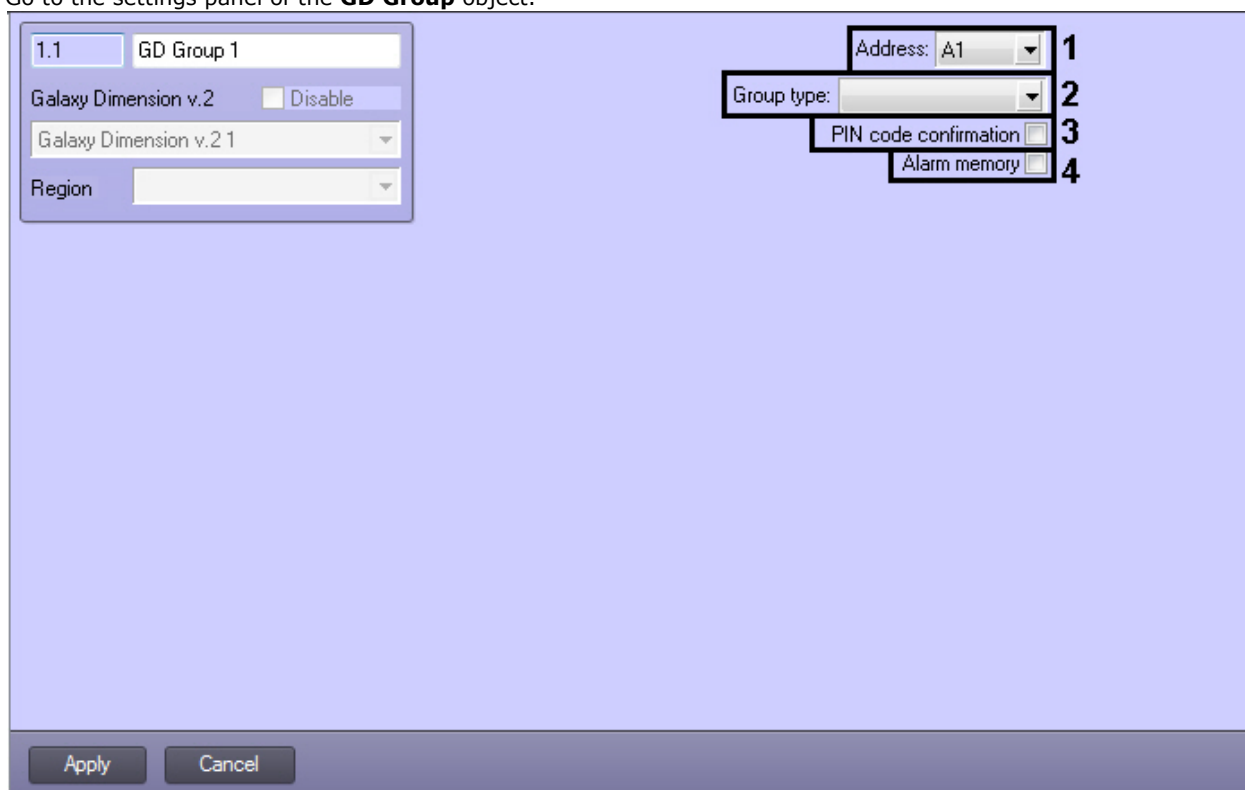


2. From the **Address** drop-down list, select the address displayed for the specific group in the operator's menu of the *Galaxy Dimension v.2* control panel.
3. From the **Group type:** drop-down list select the type of the secured area (2).
4. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (3).
5. Set the **Alarm memory** checkbox if it's required to store alarm until their proceeding by operator (4).
6. Click **Apply** button to save changes.

Configuration of the *Galaxy Dimension v.2* groups is completed.


Configuring the Galaxy Dimension v.2 control modules

Door control modules of the *Galaxy Dimension v.2* control panel are configured in the settings panel of the **GD DCM** object. This object is created from the **Galaxy Dimension v.2** object on the **Hardware** tab of the **System settings** dialog box.

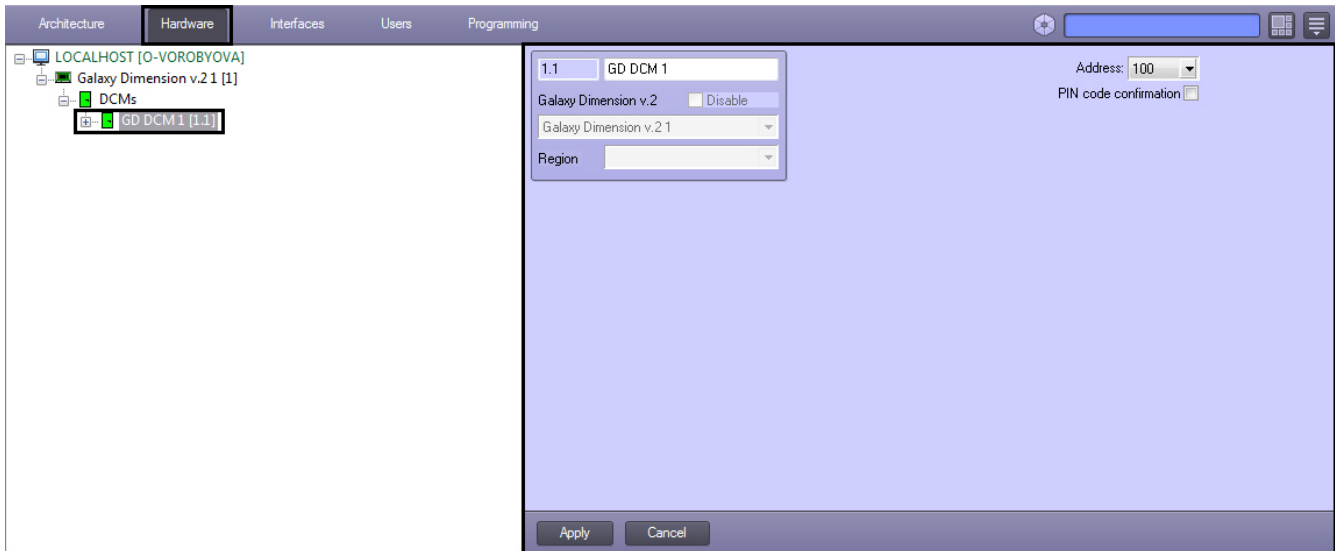

The *Galaxy Dimension v.2* control modules are configured as follows:

1. Go to the settings panel of the **GD DCM** object.

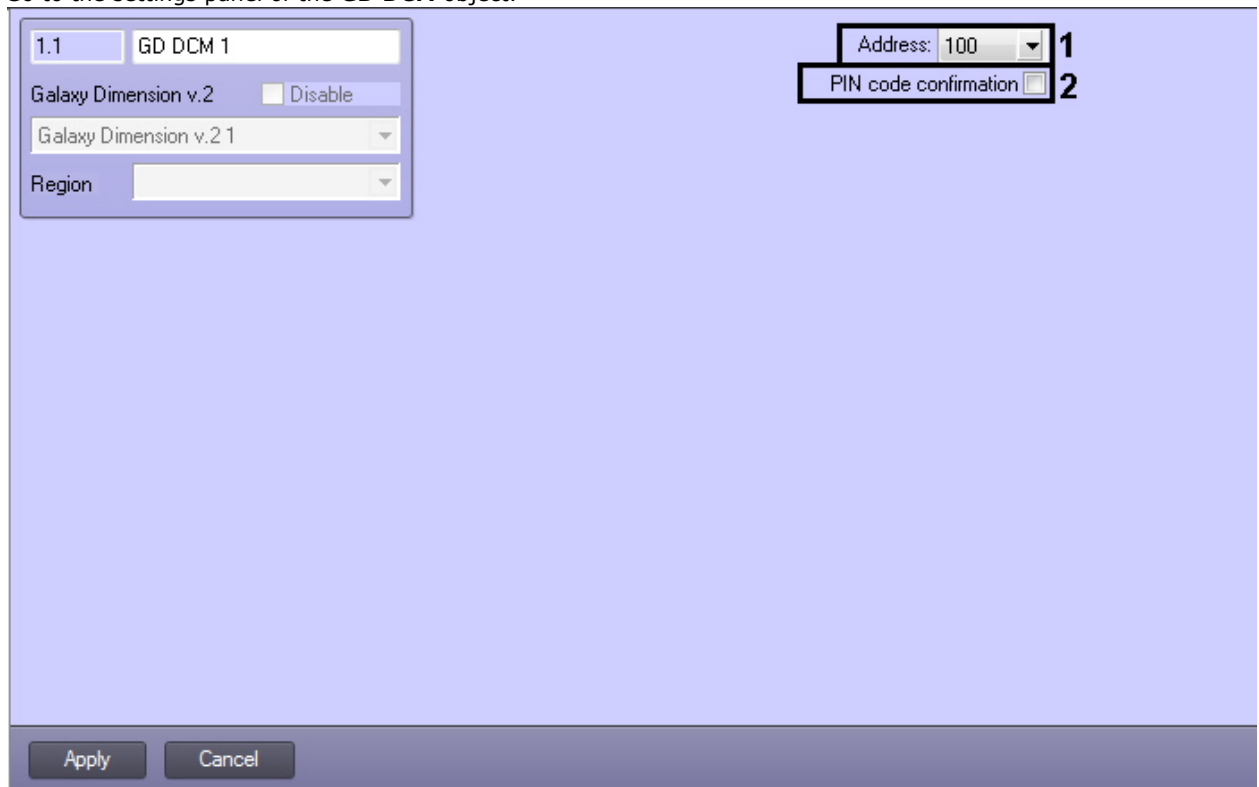


2. From the **Address** drop-down list select the address displayed for the specific control module into the operator's menu of the *Galaxy Dimension v.2* control panel (1).
3. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (2).
4. Click **Apply** button to save changes.
5. Repeat steps 1-4 for all control modules of the panel.

Configuration of the *Galaxy Dimension v.2* control modules is completed.


Configuring the Galaxy Dimension v.2 readers

The *Galaxy Dimension v.2* control panel readers are configured in the settings panel of the **GD Reader** object. This object is created from the **GD DCM** object on the **Hardware** tab of the **System settings** dialog box.

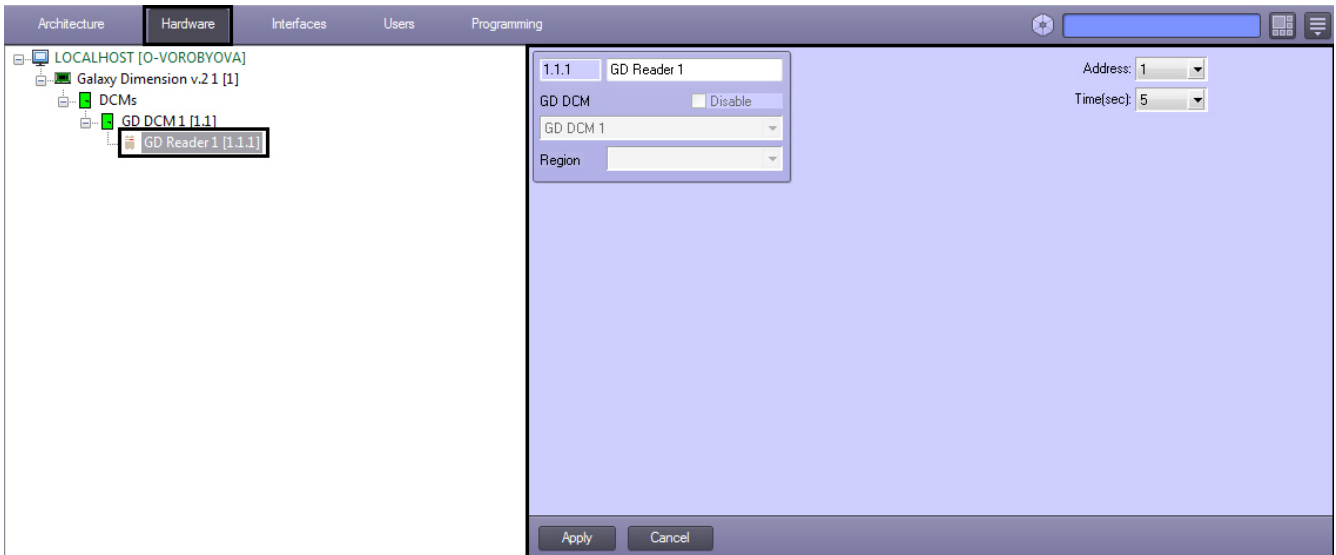

The *Galaxy Dimension v.2* readers are configured as follows:

1. Go to the settings panel of the **GD Reader** object.

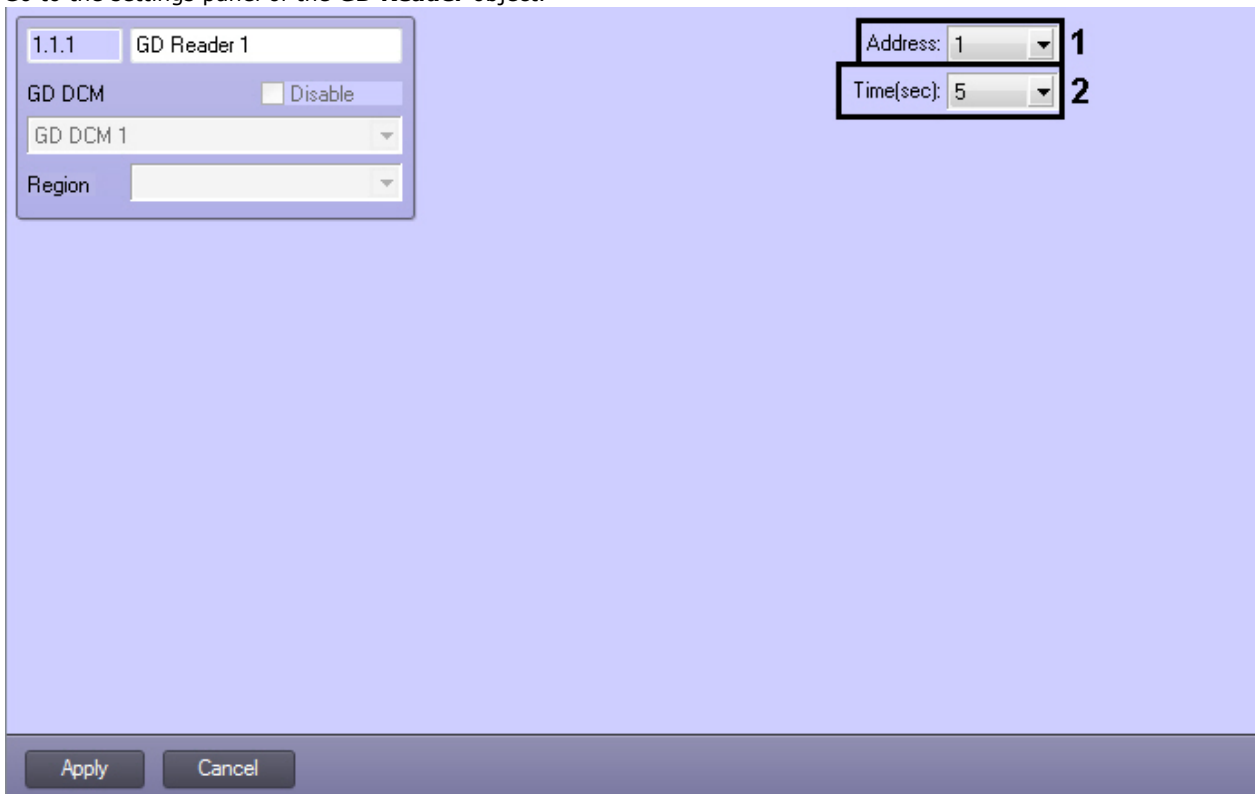


2. From the **Address:** drop-down list select the address displayed for the specific reader into the operator's menu of the *Galaxy Dimension v.2* control panel (**1**).
3. From the **Time (sec):** drop-down list select the time period in seconds after which the door control module will change its state (**2**).
4. Click **Apply** to save changes.

Configuration of the *Galaxy Dimension v.2* readers is completed.


Configuring the Galaxy Dimension v.2 input-output modules

Input-output modules of the *Galaxy Dimension v.2* control panel are configured in the settings panel of the **GD RIO** object. This object is created from the **Galaxy Dimension v.2** object on the **Hardware** tab of the **System settings** dialog box.

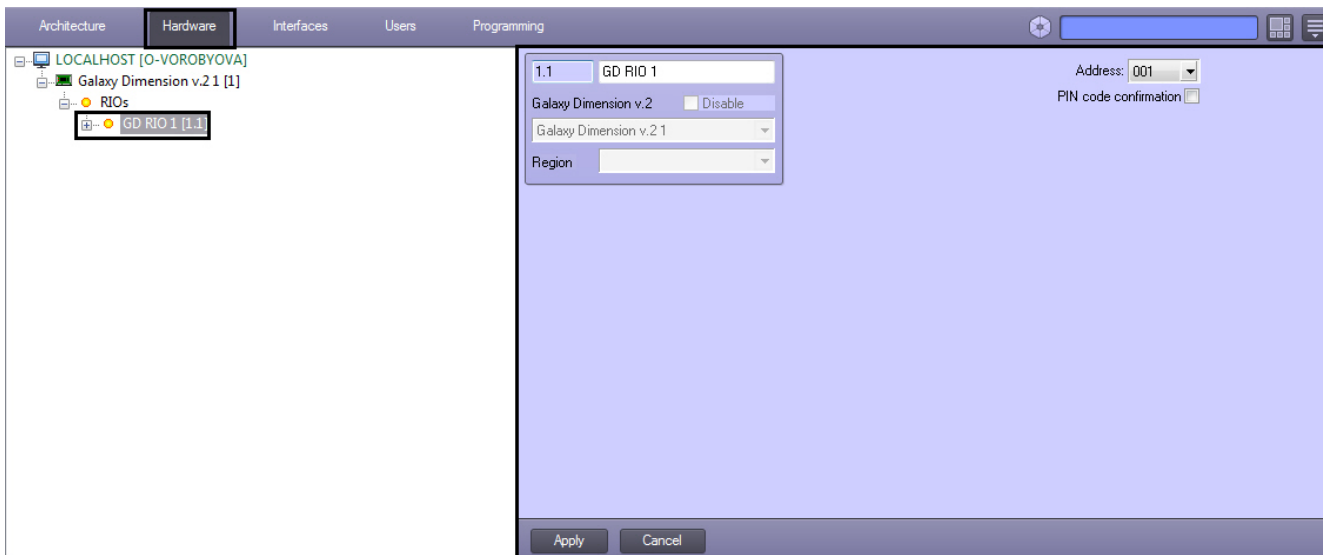

The *Galaxy Dimension v.2* input-output modules are configured as follows:

1. Go to the settings panel of the **GD RIO** object.

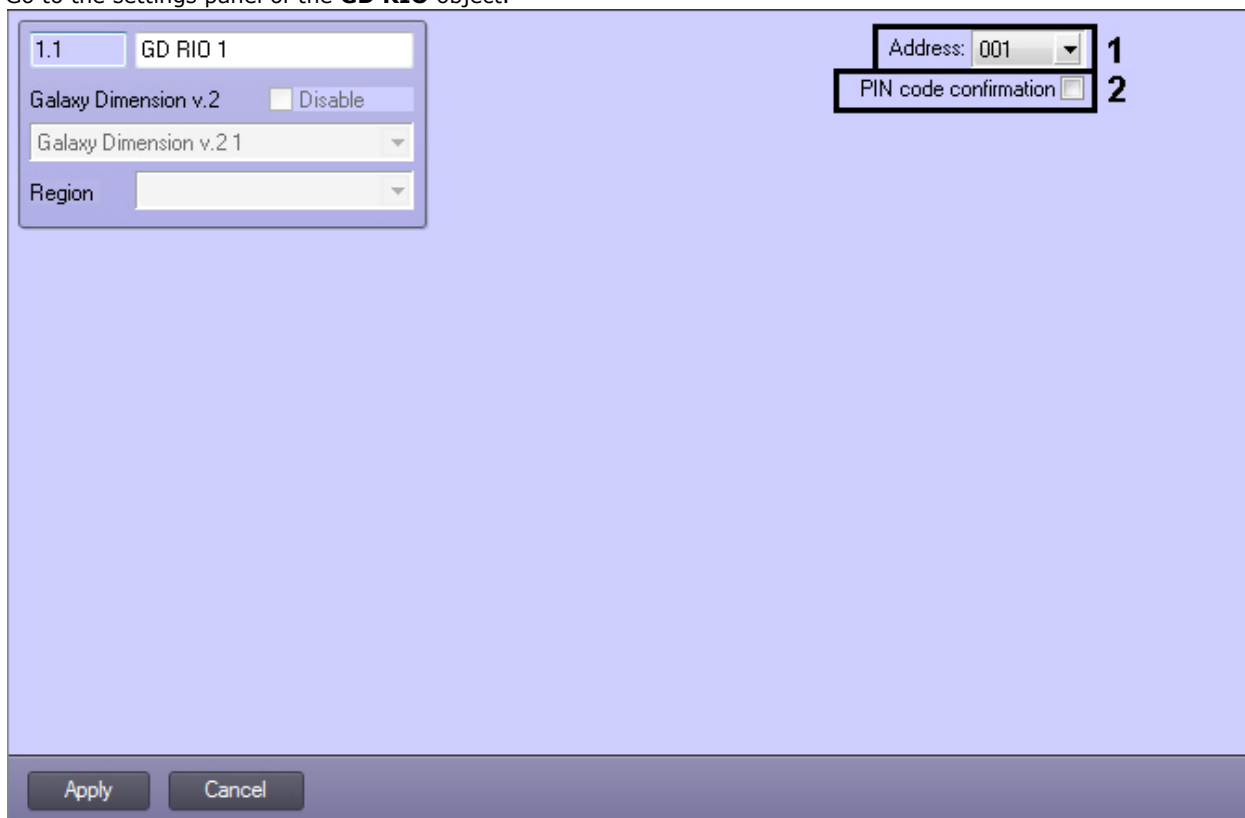


2. From the **Address** drop-down list select the address displayed for the specific input-output module into the operator's menu of the *Galaxy Dimension v.2* control panel (**1**).
3. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (**2**).
4. Click **Apply** button to save changes.

Configuration of the *Galaxy Dimension v.2* input-output modules is completed.


Configuring the *Galaxy Dimension v.2* outputs

The *Galaxy Dimension v.2* outputs are configured in the settings panel of the **GD Output** object. This object is created from the **GD RIO** object on the **Hardware** tab of the **System settings** dialog box.

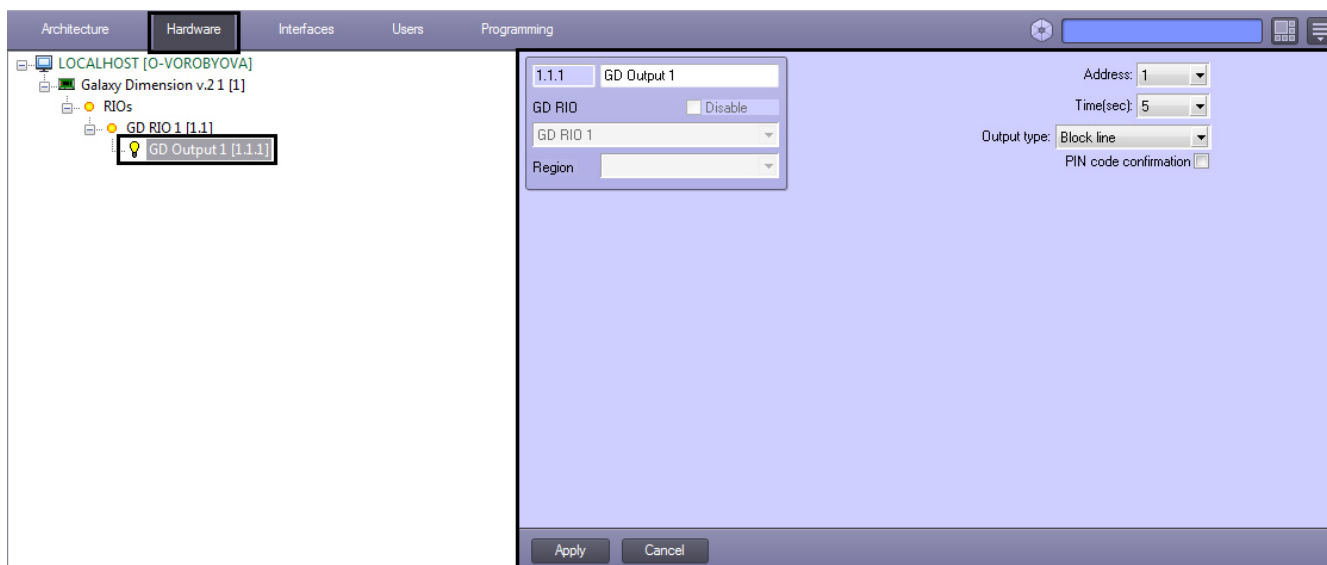

The *Galaxy Dimension v.2* outputs are configured as follows:

1. Go to the settings panel of the **GD Output** object.

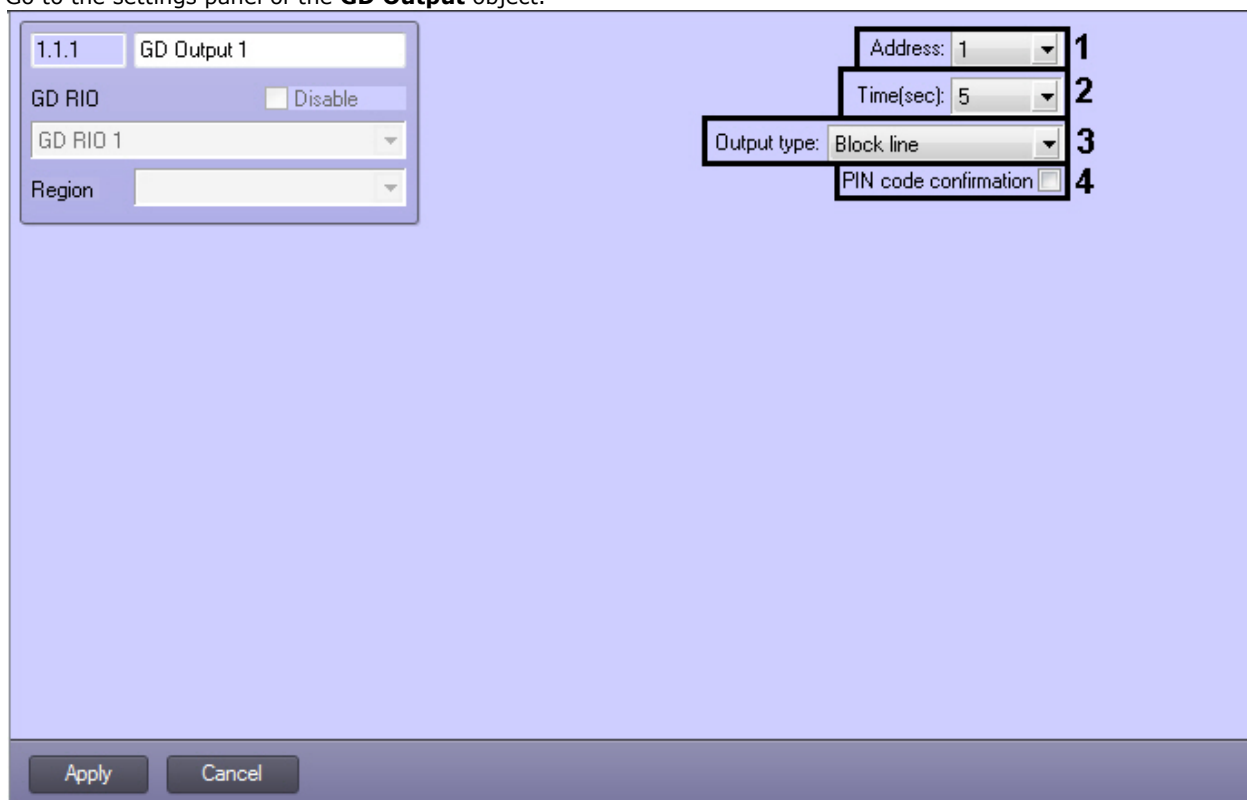


2. From the **Address:** drop-down list select the address displayed for the specific output into the operator's menu of the *Galaxy Dimension v.2* control panel (**1**).
3. From the **Time (sec):** drop-down select the time period during which exit will be granted (**2**).
4. From the **Output type:** drop-down list select the type of configured output (**3**).
5. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (**4**).
6. Click **Apply** to save changes.

Configuration of the *Galaxy Dimension v.2* outputs is completed.


Configuring the *Galaxy Dimension v.2* security zones

The *Galaxy Dimension v.2* security zones are configured in the settings panel of the **GD Zone** object. This object is created from the **GD RIO** object on the **Hardware** tab of the **System settings** dialog box.

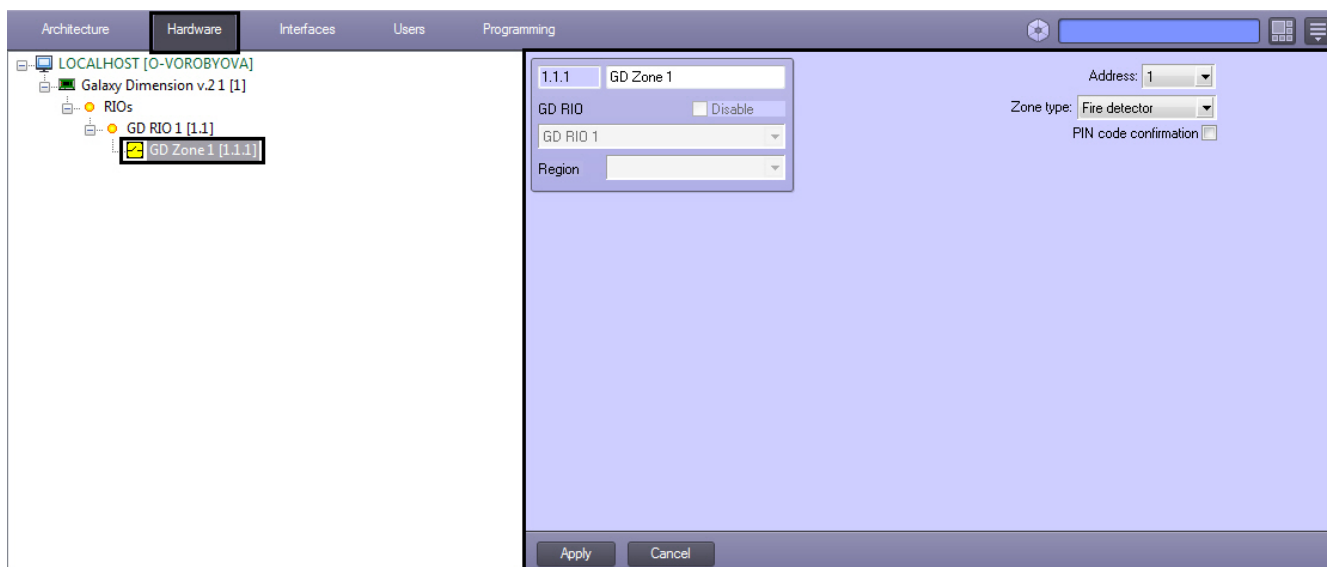

The *Galaxy Dimension v.2* security zones are configured as follows:

1. Go to the settings panel of the **GD Zone** object.

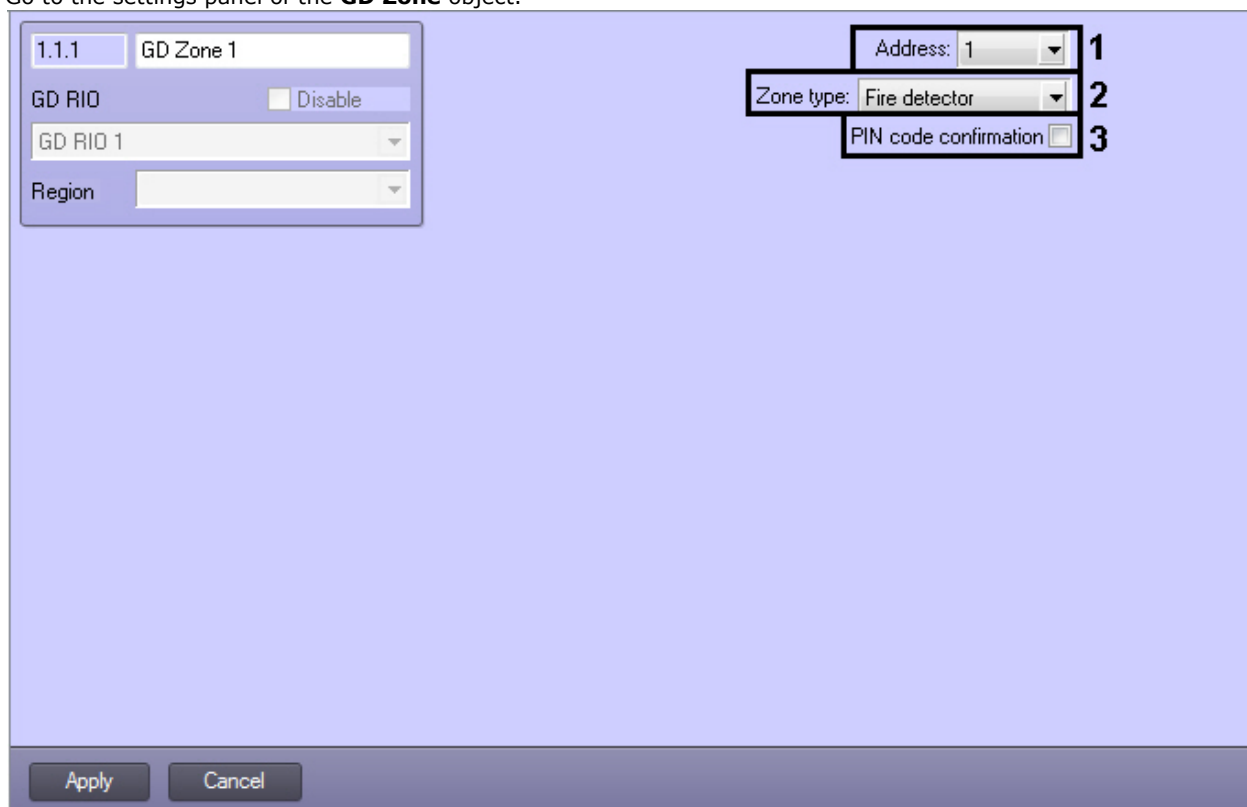

2. From the **Address:** drop-down list select the address displayed for the specific security into the operator's menu of the *Galaxy Dimension v.2* control panel (**1**).
3. From the **Zone type:** drop-down list select type of configured secured zone (**2**).
4. Set the **PIN code confirmation** checkbox if it's required to confirm operations using PIN code (**3**).
5. Click **Apply** to save changes.

Configuring of the *Galaxy Dimension v.2* security zones is completed.

Working with the Galaxy Dimension v.2 integration module

General information about working with the Galaxy Dimension v.2 integration module

The following interface objects are used to operate the *Galaxy Dimension v.2* integration module:

1. **Map**

2. Event log

Information on how to configure the **Map** and **Event log** interface objects is presented in the document titled [Intellect Software package: Administrator's Guide](#).

Operation of the specified interface objects is described in detail in the document titled [Intellect Software package: Operator's Guide](#).

Control the Galaxy Dimension v.2 group

Control the *Galaxy Dimension v.2* group is carried out in the **Map** interface window using the **GD Group** object's menu.

GD Group 1[1.1]
Reset
Unset
Part. set
Set
Abort
Handle alarm
Force set

Description of the **GD Group** object's menu commands is given in the table.

Command	Function
Reset	Resets all system alarms
Unset	Disarms group
Part. set	Arms group with zones
Set	Arms group
Abort	Cancels arming
Handle alarm	Processes alarm
Force set	Arms group under the force

Control the Galaxy Dimension v.2 keypad

Control the *Galaxy Dimension v.2* keypad is carried out in the **Map** interface window using the **GD Keypad MK7** object's menu.

GD Keypad MK7 1[1.1]
Handle alarms

Description of the **GD Keypad MK7** object's menu commands is given in the table.

Command	Function
Handle alarms	Processes system alarms

Control the Galaxy Dimension v.2 control panel

Control the *Galaxy Dimension v.2* control panel is carried out in the **Map** interface window using the **Galaxy Dimension v.2** object's menu.

Galaxy Dimension v.2 1[1]
Handle alarms
Send time

Description of the **Galaxy Dimension v.2** object's menu commands is given in the table.

Command	Function
Handle alarms	Processes system alarms

Send time	Synchronize system time of the <i>Intelect</i> Server and internal time of control panel
-----------	--

Control the Galaxy Dimension v.2 input-output module

Control the *Galaxy Dimension v.2* input-output module is carried out in the **Map** interface window using the **GD RIO** object's menu.

GD RIO 1[1.1]
Handle alarms

Description of the **GD RIO** object's menu commands is given in the table.

Command	Function
Handle alarms	Processes system alarms

Control the Galaxy Dimension v.2 control module

Control the *Galaxy Dimension v.2* control module is carried out in the **Map** interface window using the **GD DCM** object's menu.

GD DCM 1[1.1]
Handle alarms

Description of the **GD DCM** object's menu commands is given in the table.

Command	Function
Handle alarms	Processes system alarms

Control the Galaxy Dimension v.2 security zone

Control the *Galaxy Dimension v.2* security zone is carried out in the **Map** interface window using the **GD Zone** object's menu.

GD Zone 1[1.1.1]
Omit
Unomit

Description of the **GD Keypad MK7** object's menu commands is given in the table.

Command	Function
Omit	Disables arming and disarming
Unomit	Enables arming and disarming